


## XY-Stage 5102.30

- multi-axis positioning systems possible by simple combination of stages
- high-precision trapezoidal spindle drive with smoothed and tempered spindle (self-locking)
- wear resistant delta bronze spindle nut
- mounting of drive spindle free of play
- use of low-friction guides results in optimum fine adjustment due to high reproducibility of minimum system step distance
- use of stress-relieved, highly resilient materials guarantees high system stability and long life
- robust surfaces through galvanic anodisation
- three precision configurations ( **X2** : values on request)

## Specifications:

Travel range [mm]:	+/- 15
Material (base/slide):	Aluminium
Spindle pitch [mm]:	2
Max. load [N]:	2000
Min. drive torque [Nm]:	0.5
Stiffness ["/Nm]:	1
Weight [kg]:	11

## Precision configurations:

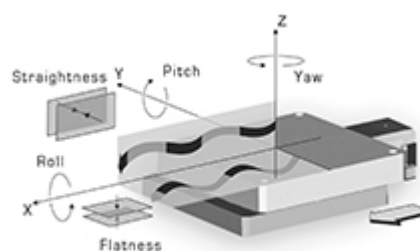

		<b>X1</b>	<b>XE</b>
Accuracy [μm]:	(+/-)	5	on request
Repeatability (unidir.) [μm]:	(+/-)	2	on request
Reversal error [μm]:		6	on request
Flatness [μm]:	(+/-)	2	2
Straightness [μm]:	(+/-)	2	2
Yaw ["]:	(+/-)	5	5

Pitch ["]:	(+/-)	5	5
Roll ["]:	(+/-)	5	5

X2 : values on request


### Modularly individually configurable:

- from basic model to high-end system
- to multi-axis systems
- with customer-specific hole pattern

### Application specific versions:

- vacuum suitable
- antimagnetic
- radiation resistant
- in black

### Dimensions [mm]:

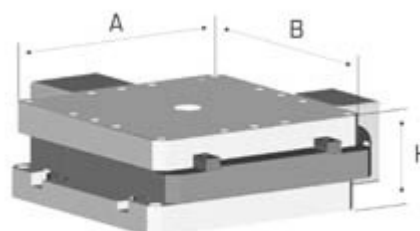

A:	B:	H:
250	250	62


### Accessories:

Motors:	2-/3-/5-Ph. Servo/DC
Hand wheels:	0056
Gear boxes:	2056.05 2056.10 2056.20
Limit switches:	included
Adjustable limit switches:	optional

Zero-point control:	9100
Encoder <b>XE</b> :	incremental
	absolut
Control system:	9300

### Maximum torque:

---

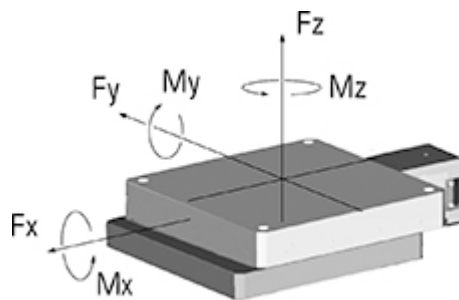

A general statement of maximum load and torque capacities is not possible for eccentric configurations.

However, our engineers will gladly calculate the maximum load capacity for your specific application.

